



FOCUSABLE LED LAMP
FOR EXAMINATION
AND MINOR SURGERY

ACEMSO15F



ACEMSO15F

IS THE FOCUSABLE LED EXAMINATION LIGHT FOR DIAGNOSTICS, MINOR SURGERY AND UNIVERSAL APPLICATIONS THAT CAN BE USED FOR MINOR PRECISION SURGERY, INTENSIVE CARE, RECOVERY ROOM, FIRST AID, COSMETIC SURGERY AND DENTAL APPLICATIONS.



ACEMSO15F

ACEMSO15F contains all the advantages of LED technology and is suitable for multipurpose uses thanks to its flexibility.

The lamp assures:

- EXCELLENT LIGHT INTENSITY
- IR-FREE LIGHT BEAM
- LIGHT BEAM FOCUSING
- COLOUR TEMPERATURE (CCT) OPTIMAL
- COLOUR RENDERING INDEX (CRI) ELEVATED
- LONG LIFE
- LOW POWER CONSUMPTION

ACEMSO15F has a light intensity of 110,000 LUX and a low power consumption. The LEDs layout gives a visual comfort and produces a uniform, homogeneous and shadowless light.

ACEMSO15F grants a uniform distribution of light and can focus the light beam with a perfect illumination both on the surface and in depth providing the operator with the best working conditions.

ACEMSO15F has a round shape that makes it handy and functional both in use and move. Its easy-to-move structure is suitable for diagnostics, test labs and dental surgery and its easy-to-grip removable and sterilizable handle makes it suitable even for critical sanitary applications.

ACEMSO15F can be supplied with ABPS (optional), a rechargeable battery powered system which supplies efficient light for every condition of use:

- emergency situations
- critical regions
- humanitarian interventions
- case of sudden black-outs
- no electrical power supply
- field hospitals without UPS or power generators



ACEMSO15F WITH ABPS BATTERY

- The lamp with ABPS has the same performance.
- The structure which covers and protects the battery is made of resistant plastic.
- The control panel on the structure allows managing: residual charge, type of power supply, recharge status and electrical power supply presence.



ACEMSO15F CONTROL PANEL

ACEMSO15F is provided with a touch panel to control all the functions of the lamp:

- **ON/OFF**
- **LIGHT INTENSITY ADJUSTMENT**
- **LIGHT BEAM FOCUSING**



TECHNICAL SHEET

Power supply input voltage **100-240 Vac - 50/60 Hz**

Colour Rendering Index (Ra/R9/R13) **98/96/100**

Power consumption **25 VA**

Working distance **70 - 150 cm**

Protection class (EN 60601-1) **I**

Light intensity adjustment **Stepless**

Light head working voltage **24 Vdc**

Light head diameter / Weight **24 cm / 2,1 kg**

LED average life **60.000 Hours about**

Handle **Removable and sterilizable**

Maximum light intensity, Ec
**Small spot 110.000 LUX
Large spot 75.000 LUX**

Colour **RAL 9002**

Colour Temperature, CCT **4.500 K**

Color temperature (TW) **OPTIONAL**

E.S.O.L.E.

Note: All photometric values are subject to 10% tolerance. All data are according to reference Standard: EN 60601-2-41, at a distance of 100 cm.

TECHNICAL FEATURES ABPS

Input voltage	100-240 Vac - 50/60 Hz	100-240 Vac - 50/60 Hz
Output voltage to light head	24 Vdc	24 Vdc
Protection class (EN 60601-1)	I	I
Battery number / Capacity	2 / 28 Ah	2 / 18 Ah
Autonomy when at max. power	24 Hours about	10 Hours about
Max. recharge time	8 Hours about	4 Hours about
ABPS total weight (Trolley included)	36 Kg	28 Kg


E.S.O.L.E.

BATTERY DIMENSIONS

A = 560 mm

B = 340 mm


C = 560 mm



ACEMSO15F IS AVAILABLE IN THE FOLLOWING CONFIGURATIONS

CEILING MOUNTED

(single, twin dome or in combination with SOLED15, SOLED15-F, STARLED3NX)




A = FROM 250 TO 1.100 mm

B = 800 mm

C = 720 mm

WALL MOUNTED




A = 240 mm

B = 800 mm

C = 720 mm

TROLLEY MOUNTED

(ABPS battery on demand)

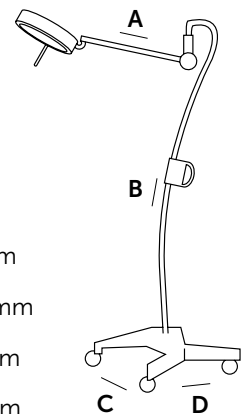

A = 720 mm

B = 1.750 mm

C = 560 mm

D = 560 mm

ACEMSO15F

ACEM IS A REGISTERED TRADEMARK OF ACEM S.P.A.
ACEM ALL RIGHTS RESERVED
ACEM RESERVES THE RIGHT TO MODIFY THE DESIGN
AND SPECIFICATIONS CONTAINED HEREIN WITHOUT ANY PRIOR NOTICE

DEP.ACEMSO15F.EN r2301



ACEM SPA | VIA DELLA TECNICA 29,
40050 - ARGELATO, BOLOGNA - ITALY
PH +39 051 721844 | info@acem.it

WWW.ACEM.IT



Management
System
ISO 13485:2016
ISO 9001:2015

www.tuv.com
ID 9105086197

