




LED LAMP FOR OPERATING ROOM

STARLED5 NX

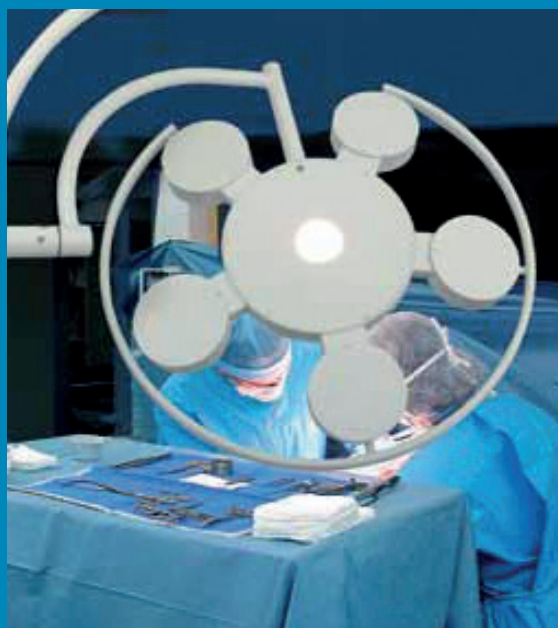

STARLED5 NX

WITH ITS CONSTANT ATTENTION TO THE EVOLUTION OF TECHNOLOGY AND CLINICAL NEEDS AND AWARE OF THE RESPONSIBILITY OF OPERATING IN A SECTOR OF SUCH IMPORTANCE AS THE MEDICAL ONE, ACEM MEDICAL COMPANY (DIVISION OF ACEM SPA) IS CONSIDERED A PARTNER FOR SURGEONS AND MEDICAL STAFF IN THE OR. **STARLED5 NX**, SURGICAL LAMP WITH LED TECHNOLOGY, IS BORN TO MEET THE NEEDS OF ITS USER GRANTING OPTIMAL PERFORMANCES, RELIABILITY AND VISUAL COMFORT. **STARLED5 NX** BOASTS AN EXCELLENT LIGHT QUALITY. THE SPECIAL OPTICS OF ITS LEDs, REALIZED BY ACEM, GENERATES A SHADOWLESS, CLEAR AND HOMOGENEOUS LIGHT ASSURING VISUAL COMFORT AND BEST WORKING CONDITIONS BOTH FOR THE SURGEON AND FOR THE MEDICAL STAFF.

A photograph of three surgeons in an operating room, wearing blue scrubs and masks, focused on a procedure. Above them is a large, circular surgical lamp with multiple LED light sources. The scene is dimly lit, with the primary light coming from the surgical lamp. A medical monitor is visible in the background on the left.

STARLED5 NX

The lamp provides:

- HIGH LIGHT INTENSITY FOR ANY TYPE OF SURGERY
- IR-FREE LIGHT
- VARIABLE COLOUR TEMPERATURE (OPTIONAL TW VERSION) TO ENSURE AN EXCELLENT REPRESENTATION OF THE OPERATING FIELD CONTRAST
- FOCUSABLE LIGHT BEAM
- EXCELLENT COLOR RENDERING INDEX (CRI)
- LONG LIFE
- LOW ENERGY CONSUMPTION
- ERGONOMICS IN USE AND EASY POSITIONING BY THE MEDICAL TEAM
- EASY, FAST AND ACCURATE I-SENSE CONTROLS

STARLED5 NX can produce a FOCUSED and AMBIENT light. Thanks to its special optics realized by ACEM, the light field focusing system adjusts the light spot diameter accurately assuring an excellent sharpness of details in the operating area. AMBIENT light is managed by ENDO function. This technology consents a visual comfort as well as a correct vision of the surrounding environment thanks to its particular light beam coming from the upper part of the lamp. **STARLED5 NX** is particularly suitable for mini invasive surgery and is ideal for the preparation and treatment during the operation, monitoring of the patient and microscope operations.

Its ergonomic and practical design takes into consideration sanitary requirements essential for the operating room. Comfortable and light to move, thanks to its central handle, **STARLED5 NX** is also practical for the medical team who can move it from the lateral handles assuring stability and constant illumination even during the movement. For this reason **STARLED5 NX** has been manufactured with a smooth and resistant material that makes cleaning quick, easy and complete. Its removable and sterilizable central handle can house a video camera on demand shooting the surgical operations accurately (the video camera can be placed on a separate arm alternatively). The lamp shape assures visual comfort and is particularly suitable for laminar flows in the operating room.

STARLED5 NX CONTROL PANEL

Functions are adjusted through the innovative easy-to-read, ergonomic and easy-to-clean I-SENSE control panel available in standard version and v2016. With a simple touch it can manage easily and accurately:

- **ON/OFF FUNCTION**
- **LIGHT INTENSITY ADJUSTMENT**
- **SIZE** - Light spot diameter adjustment to focus the operating area
- **ENDO** - Light for endoscopy ideal for minimal-invasive surgery
- **DOF - DEPTH OF FIELD** - for a deep light
- **SYNC** - (optional) function to synchronize controls of combined lamps: **STARLED5 NX** double (twin dome configuration) and with **STARLED3 NX**. The sync mode grants simplicity of use saving time and giving the possibility of being managed by a single operator. SYNC is activated through the AWN system, a wireless network connecting devices such as lamps and remote controls via a Bluetooth proprietary protocol.

AWN is available as low as from a single lamp up to a full OR system with several lamps.

Countless combinations are possible, for example:

- 1 – With one lamp and remote control**
- 2 – With two lamps without remote control**
- 3 – With three lamps and remote control**

The MASTER lamp always creates the wireless network. One or more SLAVE devices (up to 8) can be connected to the MASTER lamp.

Each network has its unique ID code to differentiate it from other nearby AWN networks thus allowing several close-up networks (lamps groups) not to interfere one another.



WRC2 REMOTE CONTROL PANEL

The wireless Wall Remote Control features full control for all the lamps connected to the same AWN network. The WRC2 features the same 4.3- inch color LCD-TFT, touch screen panel, which mirrors the I-SENSE control panel on the lamps. WRC2 remote control panel is available if AWN option is present in the lamps system.



TECHNICAL SHEET

Power supply input voltage 100-240 Vac - 50/60 Hz

Power consumption (90 W @ 160.000 LUX)

Protection class (EN 60601-1) I

Light head working voltage 24 Vdc

LED average life 60.000 Hours about

Maximum light intensity, Ec 160.000 LUX @ 100 cm

Colour Temperature, CCT

STANDARD VERSION 4.500 K
TW version From 3.000 K to 5.700 K
Stepless adjustable

Colour Rendering Index (Ra/R9/R13) 98/96/100

Working distance 70 - 150 cm

Light intensity adjustment Stepless

Light head diameter / Weight 67 cm / 12 kg

Colour RAL 9002

Wireless FHD camera in the central handle or on external additional harm Optional

Note: All photometric values are subject to 10% tolerance. All data are according to reference Standard: EN 60601-2-41, at a distance of 100 cm.

STARLED5 NX

ACEM IS A REGISTERED TRADEMARK OF ACEM S.P.A.
ACEM ALL RIGHTS RESERVED
ACEM RESERVES THE RIGHT TO MODIFY THE DESIGN
AND SPECIFICATIONS CONTAINED HEREIN WITHOUT ANY PRIOR NOTICE

DEP.STARLED5NX.EN r2301



ACEM SPA | VIA DELLA TECNICA 29,
40050 - ARGELATO, BOLOGNA - ITALY
PH +39 051 721844 | info@acem.it

WWW.ACEM.IT



Management
System
ISO 13485:2016
ISO 9001:2015

www.tuv.com
ID 9105086197

